

TimeProvider® 5000

IEEE 1588-2008 PTP Grandmaster Clock



Key Features

- Redundant hardware: inputs, outputs, clock, power
- Hardware-based packet processing
- User configurable PTP profiles
- Supports the latest ITI-T PTP profiles including ITU-T G.8265.1, ITU-T G.8275.1, and is ITU-T G.8275.2 ready
- ITU-T G.8272 Primary Reference Time Clock
- Synchronous Ethernet support with optical SFPs
- Single or dual GNSS inputs with GPS and Beidou options
- Input source priority auto-switching
- PTP and carrier grade NTP server (optional)
- PTP probe for PDV measurement (optional)
- Managed remotely and locally via CLI, or optional SNMP

Key Benefits

- Fully interoperable with standards-based clients
- Highly scalable PTP grandmaster supports 1000 PTP clients at full 128 messages per second rate
- No performance degradation as client capacity grows
- Simultaneously supports both PTP and NTP elements in your network
- Capabilities grow with TimeProvider Expansion products

Applications

- Wireless Ethernet Backhaul
- 3G and 4G / LTE
- Circuit Emulation Services (CES)
- Passive Optical Networks (PON)
- Femto Cells and Small Cells
- IPTV (NTP option)

TimeProvider® 5000 is an IEEE 1588-2008 standard compliant Grandmaster Clock with a carrier grade design that provides high client capacity, hardware-based packet processing and redundant hardware to deliver scalable performance and maximum network availability. When locked to a GPS input, the TimeProvider 5000 meets the applicable performance requirements of the ITU-T G.8272 standard for a Primary Reference Time Clock (PRTC).

With dual Input/Output Clock cards in active and standby mode, TimeProvider 5000 ensures there is no impact on client performance when failover occurs. Redundant cards provide protection far superior to “network redundancy” models where clients must re-acquire synchronization from a different grandmaster somewhere else in the network.

Protection of input clock source has become increasingly important. TimeProvider 5000's new IMC card has support for dual GPS inputs. In addition, TimeProvider 5000 supports auto-switching of input source between E1/T1 and GPS based on clock quality level and user priority settings.

TimeProvider 5000, with hardware-based time stamping and packet processing, delivers high client capacity at full rates -up to 128 messages per second -with


performance that does not degrade as the number of clients increases.

TimeProvider 5000 supports user configurable PTP profiles; the selection includes default, telecom-2008, ITU-T G.8265.1, ITU-T G.8275.1, and hybrid profiles. Support for multiple standard profiles ensures full interoperability with clients in multi-vendor environments. Synchronous Ethernet output is also supported with full traceability and ESMC support.

With optional NTP server capability, TimeProvider 5000 supports the multiple vendors and protocols found at mobile network base station sites. Both PTP and NTP protocols operate simultaneously with PTP-based and NTP-based clients. The two ports of an IOC card can be separately configured, one for PTP and one for NTP, allowing the standby IOC card to protect for both protocols. NTP capacity is up to 20,000 transactions per second (TPS), and PTP capacity remains at up to 1000 clients.

TimeProvider 5000 serves as the initial unit in a “rack and stack” configuration with TimeProvider Expansion products. These units add capabilities to the TimeProvider portfolio. Each Time Provider Expansion10 adds 16 Ethernet ports that support SyncE as well as PTP, while each TimeProvider Expansion30 adds 12 E1 and 12 PPS/TOD ports.

TimeProvider® 5000

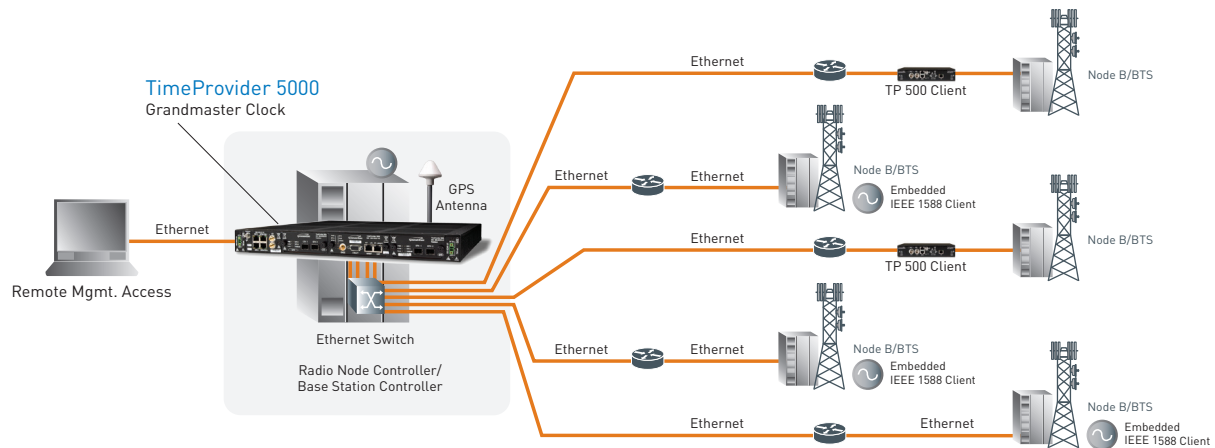

Typical wireless backhaul application utilizing the TimeProvider 5000 Grandmaster Clock with fully redundant, carrier-class architecture to provide precise timing and frequency for remote base stations over a packet-based Ethernet network infrastructure.

Specifications

GNSS INPUT OPTIONS

- 1 x GPS
- 1 x GPS and 1 x GPS/Beidou
- 2 x GPS
- All use antenna type: L1 band

INPUTS

- 2 x E1 (2.048 Mbps and 2.048 MHz)
- 2 x T1 (1.544 Mbps and 1.544 MHz)
- 2 x 1PPS and TOD

OUTPUTS

- 2 x GigE output per IOC (optical and electrical) supporting PTP, NTP, and SyncE
- 4 x E1 (2.048 Mbps and 2.048 MHz)
- 2 x T1 (1.544 Mbps and 1.544 MHz)
- 1 x 10MHz
- 1 x 1 PPS

PHYSICAL SPECIFICATIONS

- Dimensions: 44mm H x 483mm W x 435mm D (1.75" H x 19" W x 17" D)
- Weight: 4.4 kg (9.6 lbs)

POWER REQUIREMENTS

- -38.4 VDC to -75 VDC (dual redundant) @ 43W typical

ENVIRONMENTAL SPECIFICATIONS

- Operating temperature: -5°C to +45°C
- Storage temperature: -40°C to +70°C
- Humidity: 5% to 100% w/condensation

TIME STAMP PRECISION

- <10 ns rms typical

HARDWARE MODULES

- I/O Module (includes 4 x I/O ports)
- IMC Module

- IOC (Quartz) Module
- IOC (Rubidium) Module

FREQUENCY ACCURACY

- Tracking to GPS: PRS/PRC quality
- Holdover (over constant temperature):
 - Rubidium (G.812 type II) 1×10^{-11}/day
 - Quartz (G.812 type I) 1×10^{-10}/day

TIME ACCURACY

- Tracking to GPS : 100ns when locked to GPS, PRTC compliant
- Holdover (over constant temperature):
 - Rubidium (G.812 type II): 10 μ sec over 5 days
 - Quartz (G.812 type I): 10 μ sec over 1 day

CLIENT CAPACITY

- PTP: 500 clients per port, 1000 per IOC card, at 128 messages per second rate (L3, unicast)
- PTP with NTP option
 - One port with PTP: 1000 clients
 - One port with NTP: 20,000 transactions per second

NTP SERVER OPTION

- Stratum 1 sever via GPS
- Up to maximum 20,000 transactions per second

PTP PROBE OPTION

- PDV measurements
- Supports L3 unicast, L3 multicast, L2 multicast

OTHER SW LICENSE OPTIONS

- 500 VLAN license
- L2/L3 Multicast PTP and 2-step clock license
- NTP server with 20,000 TPS license
- NTP server with 120,000 TPS license
- TimeProvider Expansion10 16 port license (adds availability of ports 9-16 to standard 8 ports)
- SNMP v2c, v3 license

PROTOCOLS

- IEEE 1588-2008 (PTP)
- NTPv4 (option)
- IPv4
- DHCP
- SFTP, FTP
- DiffServ/DSCP
- VLAN (up to 16)
- TELNET
- SYSLOG
- RADIUS
- SSH

MANAGEMENT

- CLI
- SNMP v2c, v3 (optional)
- TimePictra (purchased separately)

INDUSTRY STANDARDS/REQUIREMENTS

- ITU G.811, G.812, G.823, G.8261, G.8272
- G.703, G.704, ETSI 300/Class 3.1

CERTIFICATIONS

- CE certified
 - CISPR22
 - Safety – CB Scheme 60950-1 2nd edition
- EMC
 - FCC part 15 AS/NZS Class B, EN300 386, EN55022/24, CISPR22, KN55022/24
 - NEBS GR-1089 section 2 and 3
- Environmental
 - ETSI (EN55022/EN55024) EN300019, Class T3.2
 - NEBS w/exclusion of GR-63 4.2, 4.5
- Safety
 - UL/cUL 60950-1, IEC 60950-1 CB, EN60950-1 2nd edition
- RoHS
 - 6 of 6 RoHS



Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996

E-mail: sales.support@microsemi.com

© 2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.