

# TimeProvider® 1000/1100

## Network Access Synchronization



TimeProvider 1000

TimeProvider 1100

### Key Features

- Best in class clock performance with BesTime and SmartClock technologies
- PRS with Type II/Stratum 2 and Type I/Stratum 3E holdover
- Universal input and output cards
- E1, 2.048MHz, T1, 1.544MHz, CC
- NTP server/client with MD5 authentication
- E1 and T1 span line retiming
- SNMP management

### Key Benefits

- Small footprint suitable for small or medium sized central offices
- Flexible configuration: functions as a stand alone PRS with redundant rubidium and quartz clocks or as an SSU/BITS shelf
- Fully redundant and protected
  - Up to 64 1:1 protected and configurable outputs per system

The proliferation of high-speed data, broadband multimedia and circuit-to-packet convergence is rapidly driving the need for high quality synchronization outside the network core into metro and access. However, the synchronization economics and functional requirements of access nodes differ significantly from traditional core nodes. A reduced number of outputs, smaller footprint and lower cost points, while maintaining the PRS accuracy and SSU/BITS performance of a core office synchronization system, are still critical requirements for a small office synchronization solution. The Microsemi® TimeProvider® 1000 and TimeProvider 1100 are ideally suited to meet this need.

The TimeProvider's innovative architecture combines the tasks of tracking incoming timing references, qualifying the signals, filtering and distributing precise synchronization onto a single universal Input, Output and Clock card (IOC). Available in rubidium and quartz versions, a second IOC card can be added to provide full input, clock redundancy and output protection. Local and remote provisioning and management of the TimeProvider 1000 and TimeProvider 1100 is performed through the Information Management Card (IMC).

### The TimeProvider System

#### Main Shelf

The TimeProvider 1000 and TimeProvider 1100 main shelves house the IMC, the IOCs, and the input and output connector modules. The main shelf provides up to 32 outputs or provide a mix of E1/T1 retimed spans up to a maximum of 8 retimer circuits per system. The optional expansion panel provides up to 32 additional outputs, allowing a maximum of 64 protected configurable outputs.

#### Standalone PRS

An integrated GPS option allows the TimeProvider 1000 and TimeProvider 1100 to be a standalone Primary Reference Source that meets GR 2830/G.811 requirements. Utilizing Microsemi's BesTime® technology, system outputs are constructed from the optimum characteristics of all synchronization sources.

The antenna can be installed up to 1,000 feet from the main shelf, without amplifiers and using traditional coaxial cables.

#### Network NTP

Applications today demand accurate timing and time-stamps in order to deliver better QoS and improve network performance.

The TimeProvider 1000 and TimeProvider 1100 NTP solutions provide Stratum 1 traceability to operate as a Network Time Server or can be a client to retrieve time from peers. The NTP protocol supports the MD5 authentication for more secure communication.

# TimeProvider 1000/1100

## Input, Output And Clock Function

Innovative design employs the latest technologies to combine the input, output and clock functions in one compact card. This unique architecture enables two IOCs to provide redundancy and protection simultaneously.

The IOC Card provides:

- Input performance monitoring, qualification and selection
- Holdover based on rubidium or quartz with SmartClock™ technology
- Filtering and distribution of precise synchronization
- Retiming of E1/T1 circuits

## Management Function

The communication gateway of the TimeProvider 1000 and TimeProvider 1100 is the Information Management Card (IMC), which allows provisioning and


management, collecting status information from the IOC cards and processing signal alarms. This information is provided to the network management system and/or craft provisioning software.

## BesTime Technology

The BesTime technology is based on a Multiple Input Frequency Lock Loop (MIFLL) architecture, designed to continuously analyze the relative stability of each source. During tracking and holdover modes, BesTime determines the optimum correction data and adaptively ensembles the input references to generate enhanced system performance.

## SmartClock Technology

Microsemi's SmartClock technology improves the performance and accuracy of the oscillators. Using smart firmware algorithms, SmartClock "learns" the effects

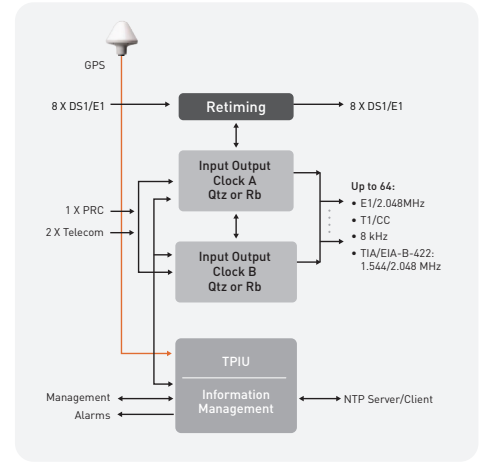

of aging on the clock while it is locked to a reference signal and stores this information. When the incoming reference signals are lost or disqualified, SmartClock applies the stored data to compensate for frequency changes, keeping a continuous distribution of highly stable synchronization signals.

## Specifications

### GENERAL

- Specifications: GR-2830, GR-1244, T1.101, G.811, G.812, G.823 and G.703
- Holdover
  - Rubidium IOC: Type II or Stratum 2 (typical: 2 x 10<sup>-12</sup>/day over constant temp.)
  - Quartz IOC: Type I or Stratum 3E (typical: 2 x 10<sup>-10</sup>/day over constant temp.)
- SSM: GR-378-CORE and ITU-T G.704
- Communications: RS-232 Serial (DB9), Ethernet (RJ45)
- NTP: Version 3 (RFC 1305) MD5 Authentication (RFC 1321)
- Management: TimeScan or TimePictra
- Provisioning: TimeCraft
- Power: -36 to -72Vdc
- Operating temp.: 0°C to 50°C

### ANTENNA

- Type: Active antenna
- Cable type: RG-58 with TNC connector
- Impedance: 50 or 75 Ω
- Cable length: Up to 1000 feet without amplifier
- Operating temperature: -35°C to +75°C

### INPUTS

- Number of inputs: 1 x 2.048, 5 or 10 MHz, 1.544 or 6.312 MHz  
2x E1, 2.048 MHz, T1, 1.544MHz, 6.312MHz, CC, JCC, JCC4 (subtended mode)
- Connectors: Wire wrap, BNC, Siemens, DB-9, SMB/Type 43

### OUTPUTS

- Number of outputs: 64 per IOC
  - Up to 32 output connections on main shelf
  - Up to 32 additional output connections on expansion panel
- Types: T1, E1, 2.048 MHz, 8 kHz, CC, 1.544 MHz, 6.312 MHz, JCC and JCC4, TIA/EIA-B-422: 1.544 & 2.048 MHz
- Connectors: Wirewrap, BNC, Siemens SMB/Type 43 DB-9 (4 or 8 connector versions)
- Retimer: Maximum 8 E1/T1 circuits per main shelf  
Each retimer module retimes 2 E1/T1 circuits
- Connector type
  - E1: BNC
  - T1: Wire-wrap

### NTP PROTOCOL

- Server mode: < 10 ms response time
- Server mode with MD5 authentication: < 50 ms response time
- Communication: 10BaseT, supporting 100 requests per second (RPS) on average
- Client time accuracy: < 10 ms between the internal NTP clocks of two machines on the same 10 Mb/sec Ethernet LAN with an unloaded network

### MECHANICAL

- Front access ETSI shelf: 7 in x 19 in x 10 in (176 mm x 484 mm x 258 mm)
- Rear access ANSI shelf: 5 in x 19 in x 10 in (132 mm x 434 mm x 258 mm)
- Expansion panel: 3.5 in x 19 in x 10 in (89 mm x 434 mm x 130 mm)

### MANAGEMENT

- TimePictra
- TimeScan
- TimeCraft
- TL-1
- SNMP v2/v3



Microsemi Corporate Headquarters  
One Enterprise, Aliso Viejo,  
CA 92656 USA

Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Sales: +1 (949) 380-6136  
Fax: +1 (949) 215-4996

E-mail: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)

© 2015 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,400 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.